

ARCHITECTURAL USL-RBIF

Recessed Baffle Linear Fixture



PROJECT		TYPE		DATE	
---------	--	------	--	------	--



Architectural
 Interior
 Damp Location
 Dimmable
 AC
 Down Light
 5 Year Warranty
 ETL LISTED

OVERVIEW

This sleek linear fixture features a recessed lens surrounded by a colored baffle, which can be custom-colored. Available in 2-foot and 4-foot lengths, it can be connected together into multiple shapes. The fixture can be surface mounted, or suspended.

FEATURES

- Recessed light with colored baffle
- Internal driver
- 0-10V dimming
- One power source supports up to 380W (~40 ft)
- Surface mount or suspended
- Joinable shapes

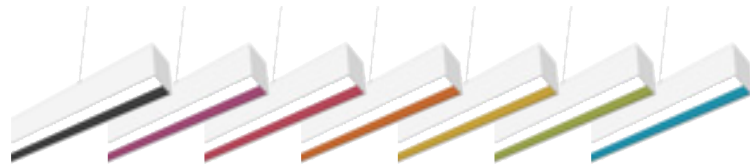

ORDERING INFORMATION

EXAMPLE PN: USL-RBIF-2-19W-LV-35K-10V-B

USL-RBIF	SIZE / POWER	VOLTAGE	CCT	DIMMING	BAFFLE COLOR
	2-19W 2 FEET, 19 WATTS	LV 100-277V	30K 3000K	10V 0-10V	B BLACK
	4-38W 4 FEET, 38 WATTS		35K 3500K		W WHITE
			40K 4000K		C CUSTOM
			50K 5000K		

ACCESSORIES

USL-RBIF-ACC	ACCESSORY
T-W	T-shaped 3-way connector, white
L-W	L-shaped corner connector, white
X-W	X-shaped 4-way connector, white
T-B	T-shaped 3-way connector, black
L-B	L-shaped corner connector, black
X-B	X-shaped 4-way connector, black
E	Straight extension connector
CPY-DWL-C	Circular canopy for drywall ceiling
CPY-DWL-S	Square canopy for drywall ceiling
CPY-SUSP-C	Circular canopy for suspension ceiling
CPY-SUSP-S	Square canopy for suspension ceiling



ARCHITECTURAL USL-RBIF Recessed Baffle Linear Fixture



SPECIFICATIONS

MODEL	OPERATION VOLTAGE	OPERATING TEMPERATURE	RATED LIFESPAN	CCT	CRI	EFFICACY
USL-RBIF	100-277V	-4°F – 104°F -20°C – 40°C	50,000 HOURS	3000K, 3500K, 4000K, 5000K	80+	61-75 lm/W

MODEL	POWER (W)	LUMENS (lm) ±10%	MAXIMUM CONNECTION LENGTH	LUMENS PER FOOT (lm/ft)	EFFICACY (lm/W)
USL-RBIF-2-19W	19	1,159	20 PCS (40 FT)	580	61
USL-RBIF-4-38W	38	2,850	10 PCS (40 FT)	713	75

DIMENSIONS

MODEL	L LENGTH	W WIDTH	H HEIGHT	WEIGHT
2-19W	23.82 in 605 mm	2.34 in 60 mm	3.46 in 88 mm	4.4 lb 2 kg
4-38W	47.44 in 1205 mm			7.9 lb 3.6 kg

