

ARCHITECTURAL USL-SLAIF

Up/Down Linear Streamline Fixture



PROJECT		TYPE		DATE	
---------	--	------	--	------	--









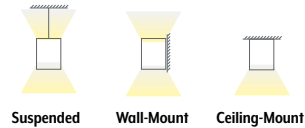
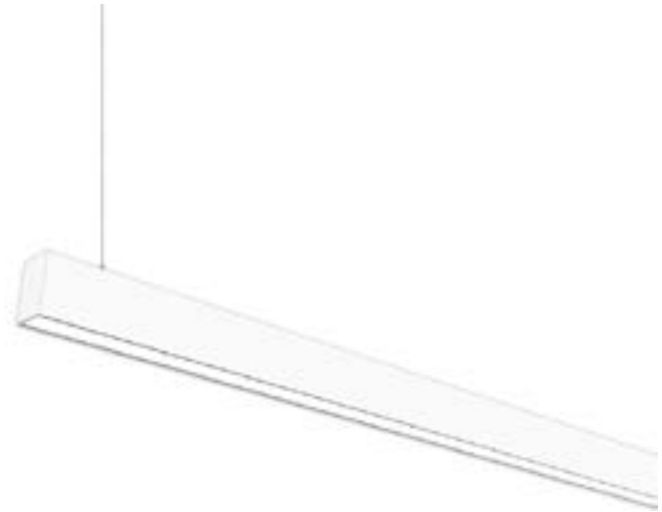

Architectural Interior Dimmable AC Down Light Up Light Up/Down Warranty

OVERVIEW

This linear streamline fixture can have 100% downlight, 100% uplight or a 50/50 split. Multiple lens options are available.

FEATURES

- 0-10V dimming
- 100% uplight option
- THD < 20%
- PF > 0.9



ORDERING INFORMATION

EXAMPLE PN: USL-SLAIF-4-40W-EXT-35K-UU-D-W

USL-SLAIF	SIZE / POWER	DRIVER	CCT	DISTRIBUTION	LENS	FINISH
2-20W	2 FT, 20W	INT INTERNAL	30K 3000K	UU 100% UP	D DIFFUSER	B BLACK
4-40W	4FT, 40W	EXT EXTERNAL	35K 3500K	DD 100% DOWN	L LOUVER	W WHITE
8-80W	8FT, 80W		40K 4000K	UD 50% UP, 50% DOWN	R REFLECTOR	RAL CUSTOM RAL
			50K 5000K		B BLOCK	

ARCHITECTURAL USL-SLA1F

Up/Down Linear Streamline Fixture



SPECIFICATIONS

MODEL	OPERATION VOLTAGE	RATED LIFESPAN	CCT	CRI	EFFICACY
USL-SLA1F	100-277V	50,000 HOURS	3000K, 3500K, 4000K, 5000K	80+	100 lm/W

MODEL	POWER (W)	LUMENS (lm) ±10%	LUMENS PER FOOT (lm/ft)	EFFICACY (lm/W)
USL-SLA1F-2-20W	20	2,000	1,000	100
USL-SLA1F-4-40W	40	4,000	1,000	100
USL-SLA1F-8-80W	80	8,000	1,000	100

DIMENSIONS

MODEL	L LENGTH	W WIDTH	H HEIGHT
USL-SLA1F-2-20W	25.28 in		
USL-SLA1F-4-40W	50.4 in	1.3 in	2.17 in
USL-SLA1F-8-80W	100.63 in		

