

Back-Lit Power/CCT Selectable Flat Panel



PROJECT		TYPE		DATE	
---------	--	------	--	------	--



OVERVIEW

This back-lit flat panel features a color-selectable model and a power-selectable model. Both of these configurations are set via a dip switch. The slim fixture fits in a wide variety of applications—anywhere that troffers would traditionally go. Available in 1x4 in addition to standard 2x2 and 2x4.

FEATURES

- Back-lit panel
- Power tunable and color adjustable options
- 0-10V dimming
- 120° beam angle
- PF > 0.9 and THD <25%
- IP20
- 1x4 option



ORDERING INFORMATION

EXAMPLE PN: USL-FPP3F-2X2-35WH-ADJ-35K-10V

USL-FPP3F	SIZE / POWER	CCT*	DIMMING
2X2-40WL-ADJ	2X2, 30/35/40 WATTS ADJUSTABLE, 105 LM/W	27K 2700K	10V 0-10V DIMMING
1X4-40WL-ADJ	1X4, 30/35/40 WATTS ADJUSTABLE, 105 LM/W	30K 3000K	
2X4-50WL-ADJ	2X4, 35/40/50 WATTS ADJUSTABLE, 105 LM/W	35K 3500K	
2X4-60WL-ADJ	2X4, 40/50/60 WATTS ADJUSTABLE, 105 LM/W	40K 4000K	
2X2-35WH-ADJ	2X2, 25/30/35 WATTS ADJUSTABLE, 130 LM/W	45K 4500K	
1X4-35WH-ADJ	1X4, 25/30/35 WATTS ADJUSTABLE, 130 LM/W	50K 5000K	
2X4-40WH-ADJ	2X4, 30/35/40 WATTS ADJUSTABLE, 130 LM/W	60K 6000K	
2X4-50WH-ADJ	2X4, 35/40/50 WATTS ADJUSTABLE, 130 LM/W	CA CCT ADJUSTABLE	

*Note: Custom CCT available 2700K-6500K. Only 3000K, 4000K, and 5000K are DLC listed.

Color adjustable is 3000K/4000K/5000K

ACCESSORIES

Located on page 3

Back-Lit Power/CCT Selectable Flat Panel




SPECIFICATIONS

MODEL	OPERATION VOLTAGE	OPERATING TEMPERATURE	RATED LIFESPAN	CCT	CRI	EFFICACY
USL-FPP3F	100-277V	-4°F – 113°F -20°C – 45°C	50,000 HOURS	2700-6500K	80+	96-130 lm/W

MODEL	POWER (W)	SIZE	LUMENS (lm) ±10%			EFFICACY (lm/W)
			3000K	4000K	5000K	
USL-FPP3F-2X2-40WL-ADJ	30	2x2	2,900	3,025	3,150	97-105
	35		3,375	3,525	3,675	96-105
	40		3,875	4,025	4,200	97-105
USL-FPP3F-1X4-40WL-ADJ	30	1x4	2,900	3,025	3,150	97-105
	35		3,375	3,525	3,675	96-105
	40		3,875	4,025	4,200	97-105
USL-FPP3F-2X4-50WL-ADJ	35	2x4	3,375	3,525	3,675	96-105
	40		3,875	4,025	4,200	97-105
	50		4,825	5,050	5,250	97-105
USL-FPP3F-2X4-60WL-ADJ	40	2x4	3,875	4,025	4,200	97-105
	50		4,825	5,050	5,250	97-105
	60		5,800	6,050	6,300	97-105
USL-FPP3F-2X2-35WH-ADJ	25	2x2	3,000	3,125	3,250	120-130
	30		3,600	3,750	3,900	120-130
	35		4,175	4,375	4,550	119-130
USL-FPP3F-1X4-35WH-ADJ	25	1x4	3,000	3,125	3,250	120-130
	30		3,600	3,750	3,900	120-130
	35		4,175	4,375	4,550	119-130
USL-FPP3F-2X4-40WH-ADJ	30	2x4	3,600	3,750	3,900	120-130
	35		4,175	4,375	4,550	119-130
	40		4,775	5,000	5,200	119-130
USL-FPP3F-2X4-50WH-ADJ	35	2x4	4,175	4,375	4,550	119-130
	40		4,775	5,000	5,200	119-130
	50		5,975	6,250	6,500	120-130

DIMENSIONS


MODEL	L LENGTH	W WIDTH	H HEIGHT	WEIGHT
USL-FPP3F-2X2	23.7 in 603 mm	23.7 in 603 mm	1.2 in 30 mm	4.96 lb 2.25 kg
USL-FPP3F-2X4	47.8 in 1213 mm			7.94 lb 3.6 kg
USL-FPP3F-1X4		11.9 in 303 mm		5.18 lb 2.35 kg

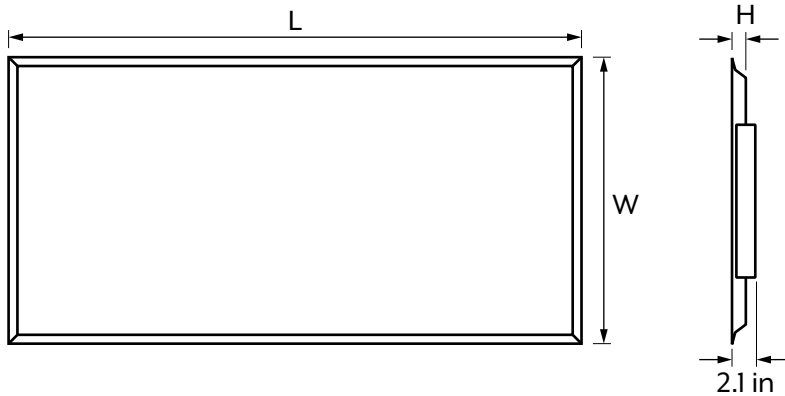

ACCESSORIES

USL-FPP3F-ACC	ACCESSORY
---------------	-----------

- SMNT-1X4** Surface mount installation kit for 1x4
- SMNT-2X2** Surface mount installation kit for 2x2
- SMNT-2X4** Surface mount installation kit for 2x4
- SPKIT-1X4** Suspension mount kit for 1x4
- SPKIT-2X2** Suspension mount kit for 2x2
- SPKIT-2X4** Suspension mount kit for 2x4
- EM-15W** Emergency driver 8/12/15W selectable, 90 minutes
- EM-20W** Emergency driver 10/15/20W selectable, 90 minutes

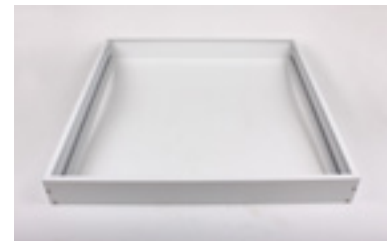


SURFACE MOUNT INSTALLATION FRAME



EMERGENCY DRIVER
Input 120-277V AC, high temperature, maintenance-free Ni-MH battery, 5-year life



RECESSED HOOKS (INCLUDED)

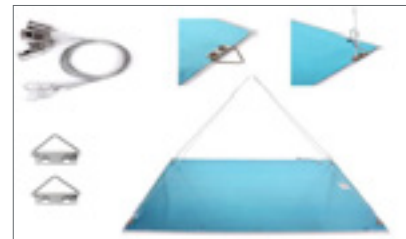

SUSPENSION MOUNT KIT